


KAPPAFLEX 1



Product group	100
Cover tube resistance	,
Safety factor	1:4
Bundled pipes/hoses	1
Hose label	orange
Max temperature (°C)	100
Reinforcement layers	1
Min temperature (°C)	-40

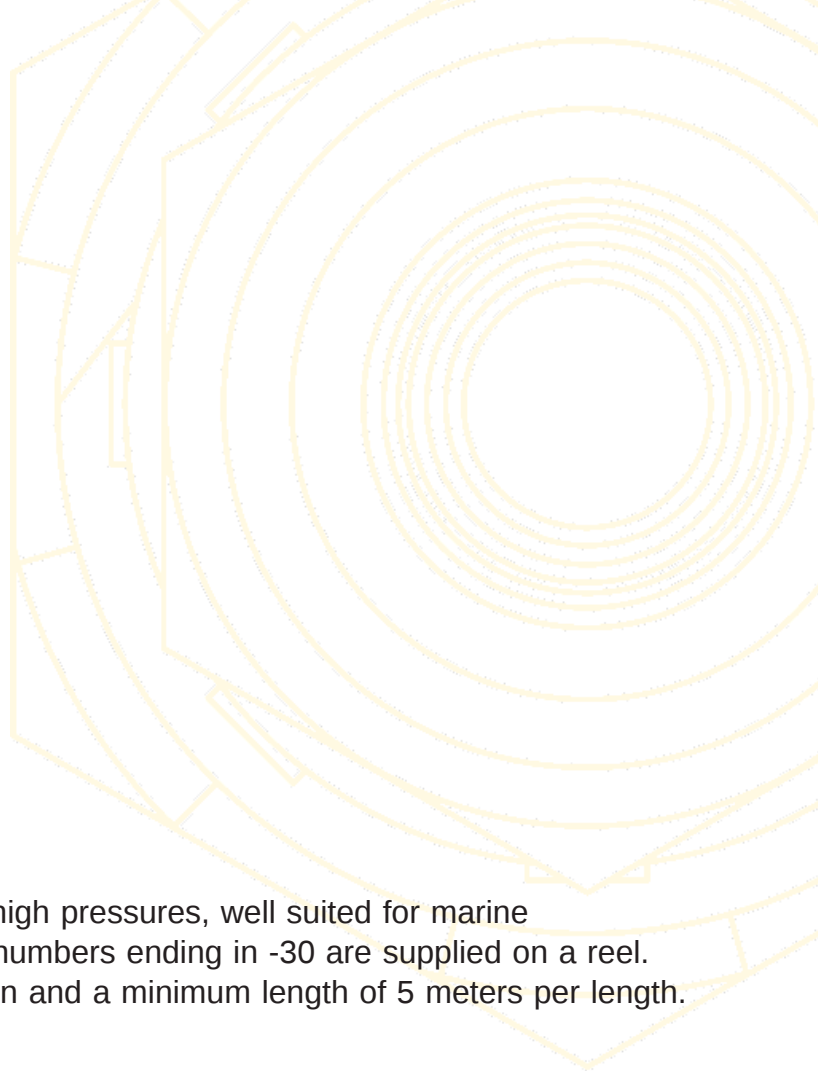

Ozone resistant hose for applications with high pressures, well suited for marine applications. Exceeds EN 857 2SC. Part numbers ending in -30 are supplied on a reel. Joints can occur, maximum 4 lengths/bobbin and a minimum length of 5 meters per length.

	ID (inch)	ID (mm)	OD (mm)	Working pressure (MPa)	Bend radius (mm)	Weight (kg)
11030304	1/4"	6.5	11.8	29	40	0.18
11030305	5/16"	8	13.6	25	55	0.21
11030306	3/8"	9.5	16.5	23	65	0.25
11030308	1/2"	13	19	20	80	0.35
11030310	5/8"	16	22.3	15	105	0.4
11030312	3/4"	19	26.2	12.5	120	0.5
11030316	1"	25	34	11	160	0.82
11030320	1 1/4"	32	44	10	300	1.28

