


Isobar 35 CO



Product group	120
Safety factor	1:4
Bundled pipes/hoses	1
Cover tube resistance	, , ,
Hose label	white
Max temperature (°C)	121
Reinforcement layers	4
Min temperature (°C)	-40

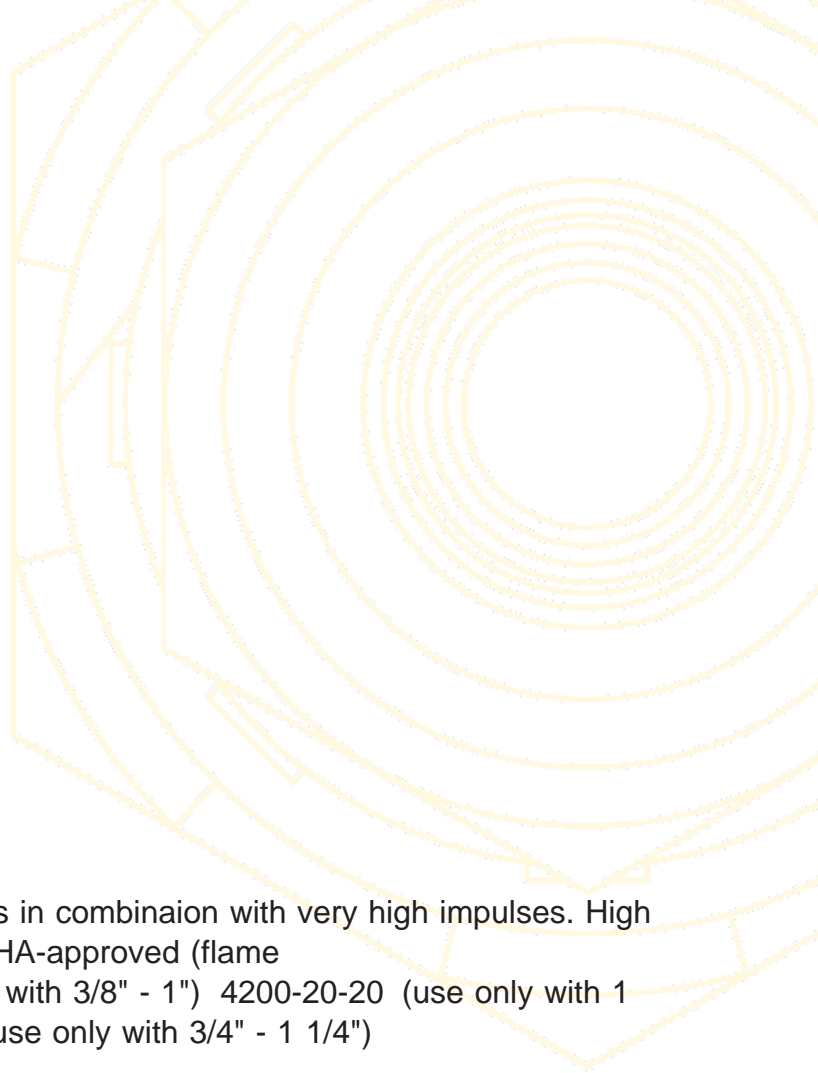

The hose is suitable for very high pressures in combination with very high impulses. High flexibility and a lot of external abrasion. MSHA-approved (flame resistant). Ferrule: 4200-19-xx (use only with 3/8" - 1") 4200-20-20 (use only with 1 1/4") 4400-09-xx (interlock) 4700-09-xx (use only with 3/4" - 1 1/4")

	Working pressure (MPa)	Bend radius (mm)	ID (inch)	ID (mm)	OD (mm)	Weight (kg)
11351332	35	630	2"	51	71.6	6.26

