

HYDROSCAND MULTIFLEX SUCTION AND PRESSURE




Product group	140
Bundled pipes/hoses	1
Cover tube resistance	, ,
Safety factor	1:3
Antistatic wire	
Flat coil	
Max temperature (°C)	120
Reinforcement layers	1
Min temperature (°C)	-30

Suction and pressure hose for oil and gasoline with no more than 50% aromatic contents. The hose is corrugated which is a very good solution where there is a need for a flexible hose.

	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Vacuum pr. Max%	Length meter per coil	OD (mm)	Weight (kg)
14386008	40	0.5	13	50	20	22	0.32
14386010	45	0.5	16	50	20	24	0.39
14386012	50	0.5	19	50	20	27	0.43
14386014	60	0.5	22	50	20	31	0.49
14386016	65	0.5	25	50	20	34	0.55
14386018	75	0.5	28	50	20	35	0.59
14386020	80	0.5	32	50	20	41	0.65
14386022	90	0.5	35	50	20	43	0.7
14386024	100	0.5	38	50	20	46	0.74
14386026	115	0.5	42	50	20	50	0.8
14386030	125	0.5	45	50	20	53	0.86
14386032	145	0.5	51	80	20	60	1
14386036	160	0.5	58	50	20	66	1.38
14386040	180	0.5	63.5	50	20	72	1.52
14386044	210	0.5	70	50	20	79	1.75
14386048	230	0.5	76	50	20	85	1.99
14386056	245	0.5	90	50	20	102	2.25
14386064	330	0.5	102	50	20	114	2.72



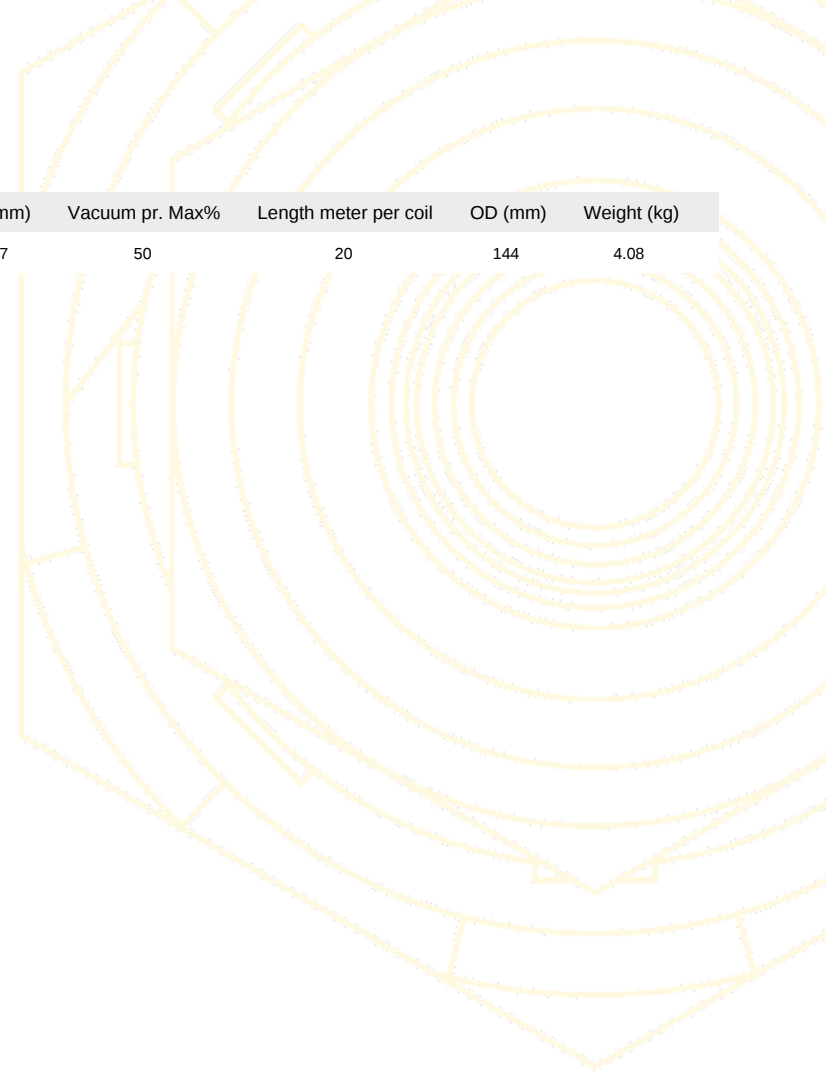

	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Vacuum pr. Max%	Length meter per coil	OD (mm)	Weight (kg)
14386080	330	0.5	127	50	20	144	4.08

