


WELDARC, WELDING HOSE EN 559 ISO 3821 20 BAR

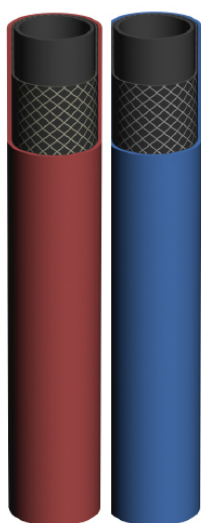

Product group	140
Safety factor	1:3
Bundled pipes/hoses	1
Antistatic wire	
Flat coil	
Max temperature (°C)	60
Reinforcement layers	1
Min temperature (°C)	-20

This welding hose is suitable for all types of aggregates, high ignition temperature and low diffusion. It is very good air pressure hose and flexible even in low temperatures. According to the latest European Norm ISO 3821.

	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Length meter per coil	OD (mm)	Weight (kg)
14400103	50	2	5	50	12	0.13
14400104	60	2	6.3	50	13.3	0.15
14400105	80	2	8	50	15	0.18
14400106	100	2	10	50	17	0.2
14400203	50	2	5	50	12	0.13
14400204	60	2	6.3	50	13.3	0.15
14400205	80	2	8	50	15	0.18
14400206	100	2	10	50	17	0.2

