


Twinarc, twin welding hose EN 559, ISO 3821, 20 bar

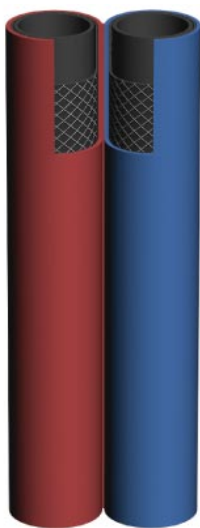

Product group	140
Safety factor	1:3
Bundled pipes/hoses	2
Flat coil	
Antistatic wire	
Max temperature (°C)	60
Reinforcement layers	1
Min temperature (°C)	-20

Twin welding hose for engineering and construction industries. The hose is also flexible in low temperatures. According to the latest European Norm ISO 3821.

	ID (mm)	Length meter per coil	OD (mm)	Bend radius (mm)	Working pressure (MPa)	Weight (kg)
14410003	5	50	12	50	2	0.26
14410004	6.3	50	13.3	60	2	0.3
14410005	8	50	15	80	2	0.36
14410006	9	50	16	100	2	0.42

