


Twin hose, liquified petroleum gas/oxygen hose, EN 559 ISO 3821 20 bar

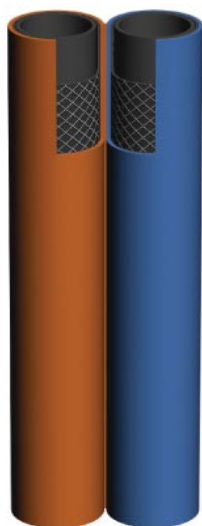

Product group	140
Safety factor	1:3
Bundled pipes/hoses	2
Antistatic wire	
Flat coil	
Max temperature (°C)	60
Reinforcement layers	1
Min temperature (°C)	-20

Twin hose for liquified petroleum gas (LPG) and oxygen. According to the latest European Norm ISO 3821.

	Bend radius (mm)	Working pressure (MPa)	ID (mm)	Length meter per coil	OD (mm)	Weight (kg)
14430004	60	2	6.3	50	13	0.3
14430006	100	2	10	50	17	0.42

