


Kappaflex 3 PO



Product group	100
Cover tube resistance	, ,
Inner tube resistance	,
Safety factor	1:4
Bundled pipes/hoses	1
Hose label	white
Max temperature (°C)	100
Reinforcement layers	3
Min temperature (°C)	-50

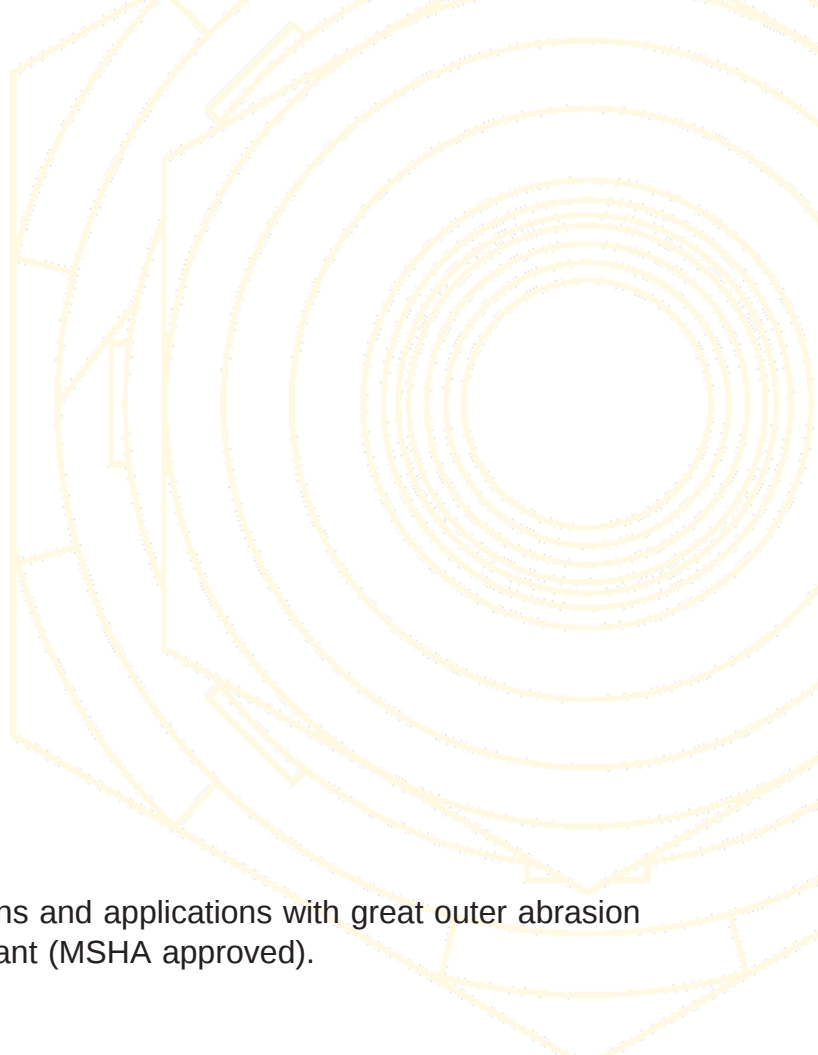

Recommended for high pressure applications and applications with great outer abrasion (32.7 - 47.0 Mpa). The hose is flame resistant (MSHA approved).

	ID (inch)	ID (mm)	OD (mm)	Working pressure (MPa)	Bend radius (mm)	Weight (kg)
11064308	1/2"	13	25.2	47	160	0.94
11064310	5/8"	16	28.8	41	210	1.13
11064312	3/4"	19	32.5	37.5	260	1.49
11064316	1"	25	40.6	32.7	310	1.99

