


SPIR STAR, TYPE 4



Safety factor	1:2.5
Max temperature (°C)	80
Reinforcement layers	4
Min temperature (°C)	-30

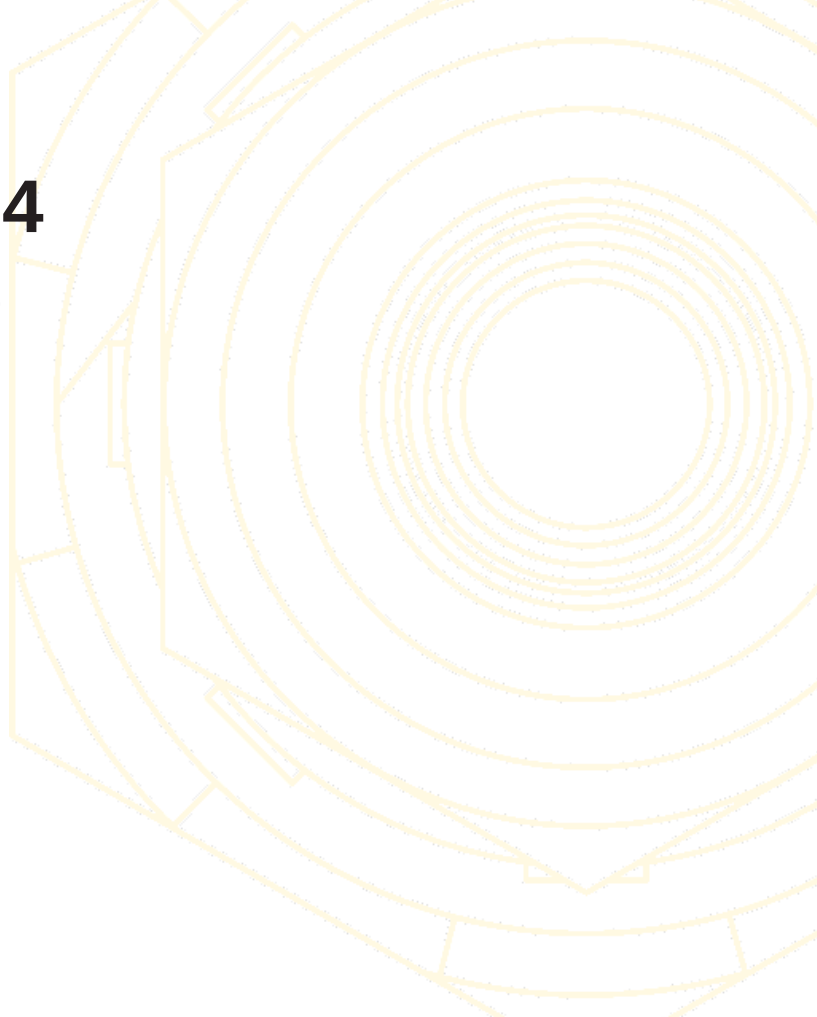

	ID (mm)	OD (mm)	Working pressure (MPa)	Bend radius (mm)	ID (inch)	Weight (kg)
12013002	4	10.3	216	130	1/8"	0.23
12013003	5	11.2	180	150	3/16"	0.26
12013004	6.3	12.6	150	180	1/4"	0.3
12013005	8	14.6	150	200	5/16"	0.39
12013006	9.9	18.4	150	200	3/8"	0.69
12013008	12.8	21.4	128	200	1/2"	0.8
12013010	16	25	100	250	5/8"	0.94
12013012	19.8	29.6	100	250	3/4"	1.35

