


# GAMMAFLEX 4



|                       |     |
|-----------------------|-----|
| Product group         | 120 |
| Cover tube resistance | , , |
| Safety factor         | 1:4 |
| Bundled pipes/hoses   | 1   |
| Max temperature (°C)  | 100 |
| Reinforcement layers  | 4   |
| Min temperature (°C)  | -40 |

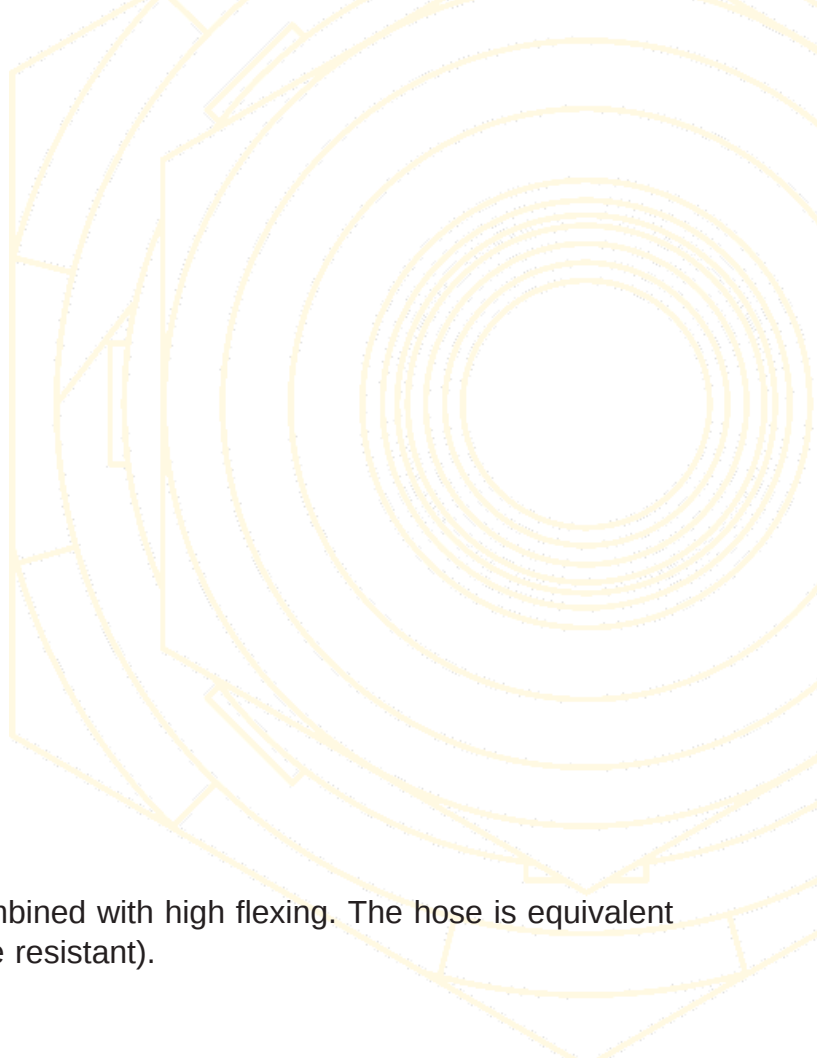

The hose is suitable for high pressures combined with high flexing. The hose is equivalent to EN856 4SP and MSHA-approved (Flame resistant).

|                 | ID (inch) | ID (mm) | OD (mm) | Working pressure (MPa) | Bend radius (mm) | Weight (kg) |
|-----------------|-----------|---------|---------|------------------------|------------------|-------------|
| <b>11150204</b> | 1/4"      | 6.5     | 17.4    | 45                     | 150              | 0.57        |
| <b>11150206</b> | 3/8"      | 10      | 21.2    | 44.5                   | 180              | 0.73        |
| <b>11150208</b> | 1/2"      | 13      | 24.4    | 41.5                   | 230              | 0.87        |
| <b>11150210</b> | 5/8"      | 16      | 28      | 35                     | 250              | 1.04        |
| <b>11150212</b> | 3/4"      | 19      | 32      | 35                     | 300              | 1.48        |
| <b>11150216</b> | 1"        | 25      | 39      | 28                     | 340              | 1.87        |

